

HONEY COMB



THICKNESS
1/4" to 1" max. relief

WEIGHT
2.9 +/- 5 lbs. per sq. ft.


INTERLOCKING
YES

RECOMMENDED ORIENTATION
HORIZONTAL



ISI-HONEYCOMB-24" X 24" PANEL

CUSTOM

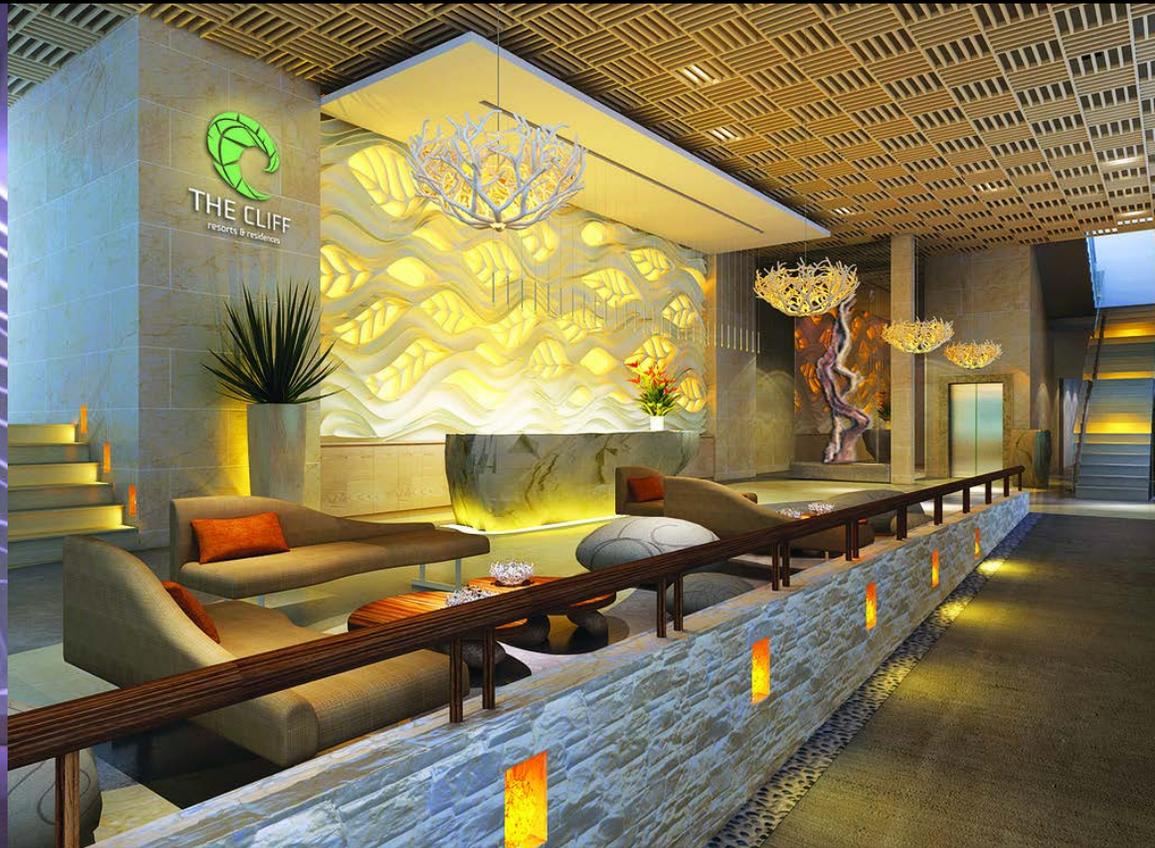

THICKNESS
1/4" to 1" max. relief

WEIGHT
2.9 +/- 5 lbs. per sq. ft.

INTERLOCKING
YES

RECOMMENDED ORIENTATION
HORIZONTAL

OTHER DETAILS

MODULE SIZE

Panel sizes vary in design patterns (all are 1 inch thick)

DESIGN SCALE

Large, dramatic scale, designed for high visual impact in larger areas where viewer is more distant. Our panel product is intended for commercial projects or larger spaces.

APPLICATIONS

Commercial locations, large interiors, lobbies, offices, nightclubs, restaurants, retail, hotels, feature walls, etc.

Curved walls: We can cast curved panels to match any radius 8' or larger. Please contact us for pricing and lead-time details.

INSTALL SUMMARY

INSTALLATION TIME:

Approximately 1 man-hour per panel. Experience may shorten.

INSTALLER SKILL LEVEL:

Finish Carpenter/Millworker/Drywall Tradesperson

- Panels are screw-mounted through the face to the substrate (typically drywall)
- All panel-to-panel edges are glued with adhesive as panels are mounted
- Seams are filled with the spackling compound
- Seams are sanded (make sure compound is dry) - wait 24 hrs. before sanding
- Surface is sealed with the primer/sealer
- Desired finish paint is applied (flat recommended)

FINISH

Two coats minimum of sealer, one to two of finish paint required (flat finish recommended). Professional paint spray equipment preferred (sealer supplied with install kit).

PACKAGING

Wooden crates. Must ship freight. Forklift or pallet jack at receiving location required. Power driver to remove crate screws.

STORAGE

Limited time in crates, store in controlled environment. Acclimate to install space for 24 hours prior to install.

